



EXR-401 SPIRAL SHRINK WRAPPER ROLLER TABLE

TECHNICAL SPECIFICATION

- Belt driven rotation unit
- Number of wraps adjustable from 3-11
- Continuous operating cycle by foot-control
- Adjustable film tension
- Rotation speed adjustable, up to 100rpm.
- Film delivery system with fractioned roller
- Mechanical operated clamping and cutting
- Film width: 76mm
- Film thickness: 19-35 micron
- Max. film outer diameter: 178mm
- Max. Rectangle: 508mm x 178cm
- Max. Square: 305mm x 305mm
- Min. Square: 102mm x 102mm
- Power Supply: 100/110/220/230/240V., 50/60HZ, 1-Phase
- Pneumatic system: 6 ± 1 bar

OPTIONS

- CE Foot Pedal Switch
- Different sizes available on request




**SPRIAL SHRINK
WRAPPER**

SYDNEY 8 WELDER ROAD
SEVEN HILLS NSW 2147
PH: 02 9674 2222
FAX: 02 9674 2288

MELBOURNE 11- 13 CLEELAND ROAD
OAKLEIGH SOUTH VIC 3167
PH: 03 9544 9777
FAX: 03 9544 5131

WEB www.ittjetpak.com.au
EMAIL info@ittjetpak.com.au

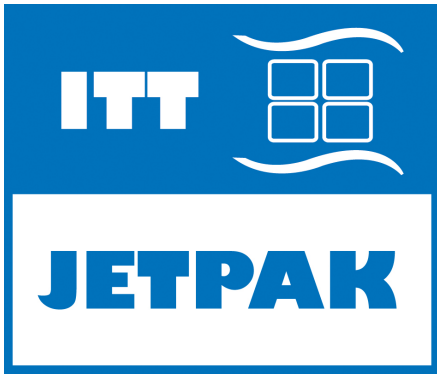

EXR-401

