

# ATS BANDING MACHINE US2000AD




**ATS**

The Range of ATS Banding machines are simple to operate and an effective method of banding products together. Ultra sonic sealing of band, no heat. Integrated high speed stacker, collating and banding systems available.

Used by Printers & Envelope manufacturers, right through to Pharmaceutical & Pet food companies.

- Adjustable band tension control.
- Soft tension control.
- Preset Band Length
- Paper or Plastic Banding materials available.
- 240V mains power, single phase, 10 Amp
- Standard machine 360mm x 260mm arch, other arch sizes available.
- Cold weld ultra-sonic technology
- Band width 30mm

# US2000AD

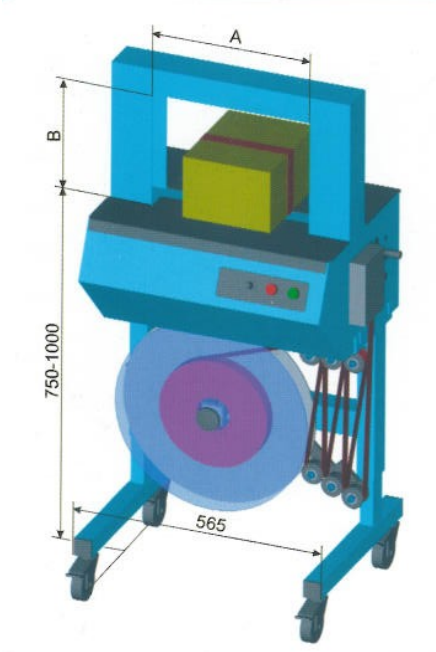

## Arch Sizes Available

Length (mm)	Height (mm)
100	120
260	120   180   260   360
360	180   260   360   500   750
500	260   360   500   900
700	260   360   550   750   900
900	260   360   500
1300	750